Slide detent installation instructions

IMPORTANT SAFETY INSTRUCTIONS

This document contains important safety and installation instructions for tool storage units. Refer to this information often for safe assembly.

SAVE THESE INSTRUCTIONS

WARNING

Improper assembly can cause unsafe conditions.
Read instructions before using or assembling.
Unsafe conditions can cause injury

Particles may fly during assembly.
Wear safety goggles. (User and bystanders)
Flying particles can cause eye injury.

Units can tip or strike you.

- **Do not open more than one loaded drawer at a time**
- **Do not force open a drawer kept closed by drawer control slide**
- **Close lid and lock drawers before moving**
- **Apply brakes on locking casters when not moving unit**
- **If unit begins to tip, stand clear**
- **Do not open any drawer with swivel caster positioned inward**
- **Do not step in or on drawers**
- **Do not use any open drawers as support or leverage**
- **Do not use add-ons as standalone units**
- **Secure units together with fasteners**
- **Unit to be used on level ground only**
- **Disconnect or unplug all power cord and cable assemblies before moving unit**

Tipping of storage unit or unit striking you can cause injury

Component edges can cut or pinch

- **Wear gloves when removing and installing components**
- **Keep fingers clear of edges when working near or with sheet metal components**
- **Keep hands and fingers clear of prybar or sharp objects**

Units' edges or components can cause injury

Risk of electric shock and fire.


- **Do not remove the ground connection**
- **Disconnect or unplug all power cords**

Electric shock or fire can cause injury.

DETENT INSTALLATION


1. Remove the drawer using the disconnect tabs

- Empty drawer contents
- Pull drawer out to full length
- Pull quick release tab on slides
- Remove drawer

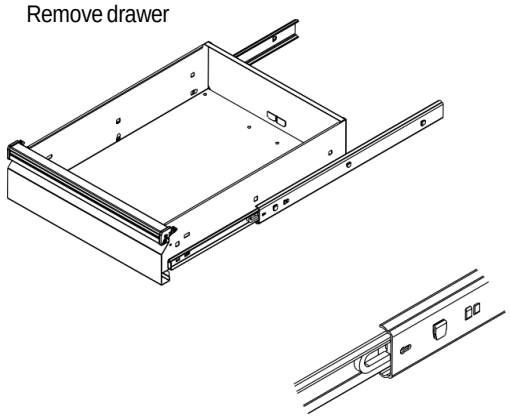


2. Replace the detent located at the back of the drawer slide

- Pry off old detent (**A**)
- Push replacement detent securely in place (**B**)
- Repeat for the opposite side

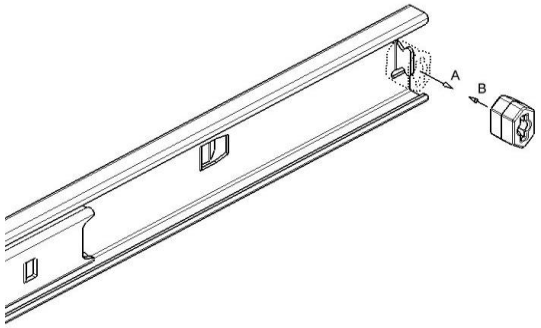

3. Reinstall the drawer

- Align drawer slides
- Insert slides
- Push drawer fully into cabinet. This will require enough force to fully seat the ball bearing slides. After initial set, slide will operate freely

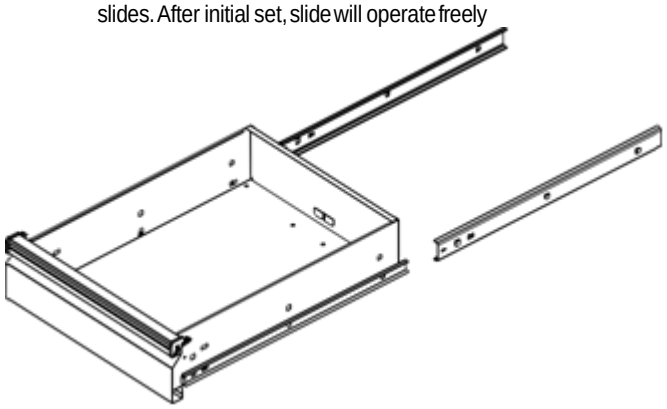

IMPORTANT
Ball retainer on right side drawer slide MUST be up against the front stop or damage can occur

Z8-05-DETKIT